

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 281 809 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
05.02.2003 Bulletin 2003/06

(51) Int Cl.7: D21F 3/02

(21) Application number: 02255326.7

(22) Date of filing: 30.07.2002

(84) Designated Contracting States:  
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
IE IT LI LU MC NL PT SE SK TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Watanabe, Kazumasa,  
c/o Ichikawa Co., Ltd.  
Bunkyo-ku, Tokyo (JP)

(30) Priority: 31.07.2001 JP 2001232599

(74) Representative: Meddle, Alan Leonard  
Forrester & Boehmert  
Pettenkoferstrasse 20-22  
80336 München (DE)


(71) Applicant: ICHIKAWA CO., LTD.  
Tokyo (JP)

### (54) Shoe press belt

(57) In a shoe press belt, in which the nip zone (N) is narrower than the shoe width (S), the shearing force which normally acts on the belt at the outer boundary of the nip zone (N) is made either weak or non-existent by forming the outer portions (Y) of the belt of less hardness than the inner, or central, portion (K) of the belt, so that the less hard portions (Y) can be positioned directly op-

posite the outer boundaries of the nip zone (N). Alternatively, the outer portions (Y) of the belt can be made thinner than the central portion (K) of the belt and the thinner portions positioned directly opposite to the nip zone (N) boundaries. The shearing force applied to the belt at the nip ends of the roll is reduced or eliminated, cracking resulting from the shear force is reduced or avoided, and a belt having improved durability results.

## FIG.1

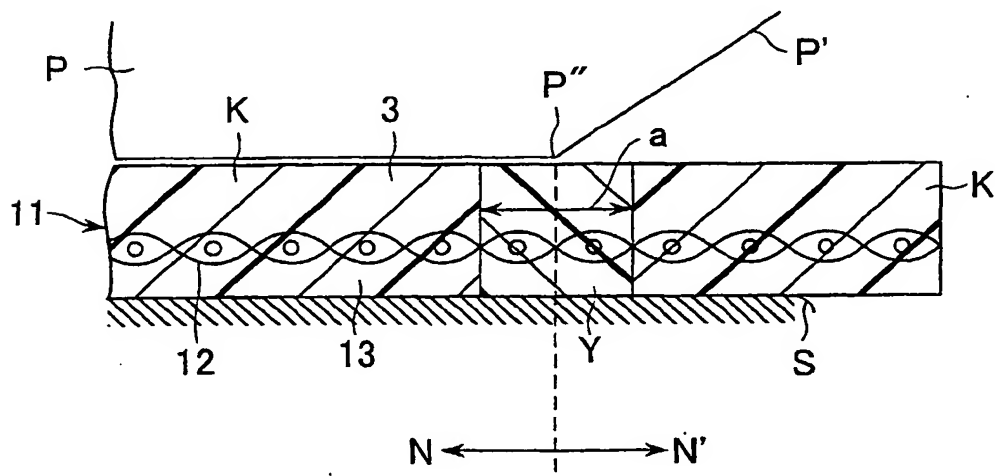

EP 1 281 809 A2

## Description

### FIELD OF THE INVENTION

**[0001]** This invention relates to a belt for a shoe press in the press part of a papermaking machine. In particular, the invention relates to improvements in the durability of a shoe press belt.

### BACKGROUND OF THE INVENTION

**[0002]** Shoe presses used in recent years in the press parts of papermaking machinery are classified roughly into the two types shown in FIGs. 8 and 9. Each of these shoe presses includes a press roll P and a shoe S. The shoe S has an arcuate top recess conforming with the bottom of a roll P. An endless upper felt 92 and an endless lower felt 93 run between the roll P and the shoe S, and a wet web W runs between the felts 92 and 93. An endless press belt B runs between the lower felt 93 and the shoe S, and follows the felt 93. The shoe S urges the belt B upward to press the felts 92 and 93 against the roll P. The effect of the shoe is to form a wide nip zone, which improves the water squeezing effect of the pressure exerted between the roll P and the shoe S.

**[0003]** The press belt B of the shoe press 91 shown in FIG. 8 is relatively long, and runs under constant tension over guide rollers 94, there being four such guide rollers in the apparatus of FIG. 8. The press belt B of the shoe press 91 shown in FIG. 9 is relatively short, and its path is a small circle.

**[0004]** In general, as shown in FIG. 10, the press roll P of each shoe press 91 includes both a cylindrical central portion, and end portions P' tapering in the axial outward direction. The shoe S of each shoe press 91 has chamfered round ends S'.

**[0005]** In the older shoe presses of the foregoing types, the nip zone N, that is, the zone underneath the middle portion of the press roll not including the tapered end portions P', was wider than the shoe width S", the shoe width being the width of the middle portion of the shoe, not including the chamfered round ends S'. On the other hand, in some current shoe presses, as shown in FIG. 10, the nip zone N formed between the roll P and the shoe S is narrower than the shoe width S". The zones above the end portions of the shoe outside the nip zone N may be referred to as non-nip zones N'.

**[0006]** In the shoe press shown in FIG. 10, a shearing force acts continuously on the press belt B at the boundaries P", between the nip zone N and the non-nip zones N', at the inner ends of the tapered end portions P' of the press roll. As a result of the shearing force, cracks are liable to develop along the boundary P" in the belt B. These cracks adversely affect the durability of the press belt, making it unsuitable for long-term use.

**[0007]** In view of the foregoing problem, the object of this invention is to provide a durable shoe press belt, in which the shearing force acting at the boundary be-

tween the nip zone and the non-nip zones is either non-existent or sufficiently weak that it causes minimal damage to the press belt.

**[0008]** In accordance with the invention, a specially constructed shoe press belt is used in a shoe press which comprises a press roll and a shoe, and in which the nip zone formed between the press roll and the shoe is narrower than the shoe. In this press, therefore, there is a nip zone, and at least one non-nip zone, meeting at a boundary, which will ordinarily coincide with the outer end of a cylindrical part of the press roll. The press belt, which extends through the nip zone and the non-nip zone, has a body comprising a hard portion and a portion of less hardness, and a part of the portion of the belt having less hardness is directly opposite the boundary between the nip and non-nip zones.

**[0009]** In one preferred embodiment of the invention, the hard portion of the belt body comprises a high molecular weight elastic material, and the portion of the belt body having less hardness comprises a high molecular weight elastic material having a hardness less than that of the high molecular weight elastic material of the hard portion of the body.

**[0010]** In another preferred embodiment, the hard portion of the body comprises a dense, high molecular weight, elastic material, and the portion of the body having less hardness comprises a high molecular weight elastic material having voids formed therein.

**[0011]** In still another embodiment, the belt body comprises a thin portion and a thick portion, so that a part of the thin portion can be positioned directly opposite the boundary between the nip and non-nip zones.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0012]** FIG. 1 is a schematic cross section of the main portion of a belt embodying the invention;

**[0013]** FIG. 2 is a cross section of the main portion of a belt embodying the invention which includes a hard inner portion and an outer portion of less hardness, the outer portion extending outward from a point slightly inward relative to the adjacent end of the cylindrical part of the press roll;

**[0014]** FIG. 3 is a cross section of the main portion of a belt embodying the invention, which includes a hard inner portion and an outer portion of less hardness, the outer portion extending outward from a point coinciding with the adjacent end of the cylindrical part of the press roll;

**[0015]** FIG. 4 is a cross section of the main portion of a belt embodying the invention, which includes a hard inner portion and a portion of less hardness, extending from a point slightly inward relative to the adjacent end of the cylindrical part of the press roll, to the outer end of the cylindrical part of the press roll;

**[0016]** FIG. 5 is a cross section of the main portion of a belt embodying the invention, and including a thin outer portion, the belt including a tapered portion extending

outward from a point located inward relative to the adjacent end of the cylindrical part of the press roll;

[0017] FIG. 6 is a cross section of a main portion of a belt embodying the invention, and including a thin outer portion, the belt including a tapered portion extending outward from a point coinciding with the adjacent end of the cylindrical part of the press roll;

[0018] FIG. 7 is a cross section of the main portion of a belt embodying the invention, and including a tapered portion which extends from a point located inward relative to the adjacent end of the cylindrical part of the press roll. The outer edge of the tapered portion is also on the inside relative to the adjacent end of the cylindrical part of the press roll;

[0019] FIG. 8 is a schematic view of the main portion of a shoe press incorporating a long type shoe press belt;

[0020] FIG. 9 is a schematic view of the main portion of a shoe press incorporating a short type shoe press belt; and

[0021] FIG. 10 is a schematic view showing the relationship of a press roll, a shoe and a shoe press belt.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] Embodiments of the invention are described below with reference to FIGs. 1 - 7.

[0023] Each of the belts in accordance with the invention is designed for use with one of the shoe presses 91, shown in FIGs. 8 and 9, in which the nip zone N, formed between the press roll P and the shoe S, is narrower than the shoe.

[0024] Each belt includes a body 11, as shown in FIG. 1, and, in each of FIGs. 1 - 4, the belt body 11 comprises a hard portion K, and a portion Y having a hardness less than that of portion K. In a typical shoe press belt in accordance with the invention, the hard portion K is a central portion, and the belt has two portions K, having less hardness, the two portions extending along the central portion in side-by-side relationship with the central portion. The portion Y is positioned so that a part of the portion Y is directly opposite the nip end, at the boundary P" between the nip zone N and the non-nip zone N'.

[0025] In each of FIGs. 5 - 7, the belt body 11 comprises a thin portion H and a thick portion T. The thin portion H is positioned so that a part of the thin portion is directly opposite the nip end, at the boundary P" between the nip zone N and the non-nip zone N'. Although the thick portion T is uniform in thickness, the thin portion H varies in thickness, and includes all, or at least part of, a tapered transition connecting the outer part of the thin portion with the thick portion.

[0026] As shown in FIG. 1, the belt body 11 includes a base body 12 and a high molecular weight elastic material 13. The elastic material 13 may be rubber or another elastomer, and is preferably a polyurethane resin. The base body 12 imparts strength to the belt body 11

and may be any one of a number of known structures. For example, the base body 12 may be a woven fabric having a warp and weft, a fabric formed of a warp and weft superimposed on each other, or a fabric formed from a ribbon of cloth wound in a spiral.

[0027] The belt body 11 can be produced by a process in which both sides of the base body 12 are coated and filled with a high molecular weight elastic material 13. The upper and lower layers of the elastic material 13 are joined to each other at the filling yarns (not shown) in the base body 12, and cover both sides of the base body 12. After the elastic material 13 cures, water holding grooves (not shown) may be formed in the surface of the outwardly facing elastic layer of the belt.

[0028] In accordance with a recently proposed alternative process, the belt body 11 may be manufactured by filling the base body 12 with high molecular weight elastic material 13 from only the upper side of the base body, while causing the elastic material to accumulate on both sides of the base.

[0029] Alternatively, the belt may have a high molecular weight elastic material 13 only on the press roll side of the base fabric so that base body is exposed on the shoe side. In another alternative, the belt may have a high molecular weight elastic material 13 on the press roll side of the base fabric, while the shoe-facing side may have a high molecular weight elastic material almost flush with the shoe-facing surface of the base fabric.

[0030] In FIG. 1, the belt body 11 comprises a hard portion K and a portion Y having less hardness than that of portion K. The less hard portion Y extends through distance "a", spanning the nip end of the press roll P at boundary P".

[0031] The difference in hardness between the less hard and hard portions Y and K depends on the selection of the high molecular weight elastic material. Where the belt body 11 is used at a relatively high temperature of 50EC or more, the less hard and hard portions Y and K may be resins that soften with heat to different degrees. The difference between the degrees of softening of the two portions of the belt results in a difference in hardness between the portions Y and K when the belt is in operation.

Alternatively, the portions Y and K may be made from identical materials or from high molecular weight elastic materials having identical properties, including hardness.

The portion Y may be made less hard by the presence of air bubbles or other voids, while the hard portion K is more dense. In this case, a difference in the mechanical structure between the portions Y and K of the belt body results in a difference in hardness.

[0032] The high molecular weight elastic material may be formed with air bubbles or other voids in it by including hollow fillers or hollow microcapsules in the material, by including a foaming agent in the material, or by introducing air bubbles into the material by means of an air

mixing machine.

**[0033]** The diameters of the air bubbles or other voids vary with the type and hardness of the selected high molecular weight elastic material, the function of the belt, and other factors. In general, it is preferred that the diameters range from 10 to 100  $\mu\text{m}$ . Experiments have verified that, where hollow fillers or the like are used to produce the voids in the less hard portion Y, the optimum ratio of the voids to the high molecular weight elastic material is achieved where the hollow fillers constitute from about 0.5 to 50 percent by weight of the material of the portion Y. In the case of air bubbles, experiments have verified that the bubbles should be present in an amount in the range from approximately 0.2 to about 30 percent by volume of the material of the portion Y.

**[0034]** It is preferable that the voids in the less hard portion Y be independent of each other, so that cracks do not propagate from one void to the other voids. Where the independent voids are formed by the use of hollow fillers or hollow microcapsules, the voids are more uniform in size, and consequently, a consistent quality can be more easily achieved in the less hard portion Y.

**[0035]** The belt body 11 may comprises an outer less hard portion Y, and a hard portion K positioned within the nip zone N of the press roll P. Alternatively, the belt body 11 may comprise a first hard portion K, a less hard portion Y and a second hard portion K'. The first hard portion K is inside the nip zone N, while at least part of the second hard portion K' is within the non-nip zone N'. The latter form of belt is preferred for use in a shoe press requiring that the belt edges be strong when the belt is fitted to the press.

**[0036]** It is preferable that the hard portions K and K' should have a hardness between 85° and 98° (JIS-A). It is also preferable that the less hard portions Y should have a hardness between 80° and 95° (JIS-A). The difference in hardness between the hard and less hard portions K (and K') and Y should preferably range between about 1 and about 5 degrees. These preferred ranges of hardness and the preferred differences between the hardnesses of the hard and less hard portions have been verified by experiment.

**[0037]** FIG. 2 shows a belt comprising an outer, less hard portion Y and an inner, hard portion K. The boundary between the hard portion K and the less hard portion Y of the belt is located at a point P<sub>n</sub> to the inside of the nip end boundary P" of the press roll P. Thus, the less hard portion Y spans the boundary P" at the adjacent nip end.

**[0038]** FIG. 3 shows another belt comprising an outer, less hard, portion Y and an inner, hard portion K. The boundary between the hard portion K and the less hard portion Y of this belt is coincides with the nip end boundary P" of the press roll P. This belt is another embodiment in which the less hard portion Y is directly opposite the nip end boundary P".

**[0039]** FIG. 4 shows a belt comprising a first hard por-

tion K, a less hard portion Y, and a second hard portion K'. The first hard portion K is to the inside on the belt relative to the less hard portion Y. The boundary between the first hard portion K and the less hard portion Y of this belt is located at a point P<sub>n</sub> to the inside of the nip end boundary P". The boundary between the less hard portion Y and the adjacent second hard portion K' coincides with the adjacent nip end boundary P".

**[0040]** In the embodiments shown in FIGs. 1-4, each of the hard and less hard portions K (and K') and Y may be uniform in hardness. Alternatively, there may be hardness gradients at the boundaries between the portions K (and K') and Y.

**[0041]** FIGs. 5 - 7 show belt bodies 11 each comprising an outer thin portion H and an inner thick portion T, where part of the thin portion is directly opposite to the nip end boundary P" between the nip zone N and the non-nip zone N'.

**[0042]** In FIG. 5, the inner thick portion T extends to a point P<sub>n</sub>, which is to the inside of the adjacent nip end boundary P" of the press roll P. From point P<sub>n</sub>, the belt is tapered at D from an edge D1 to an edge D2. From edge D2 outward, the belt is of a uniform thickness less than that of thick portion T. The outer thin portion H includes not only the outer portion of uniform thickness, but also a part of the tapered portion of the belt. In this embodiment, the belt is out of direct contact with the nip end of the belt.

**[0043]** In FIG. 6, the belt includes a tapered portion D between the inner thick portion T and an outer thin portion of uniform thickness. The tapered portion D extends from edge D1, which coincides the adjacent nip end boundary P" of the press roll P, to edge D2. In this case, the thin portion of the belt includes the entire tapered portion. Because the tapered portion D begins at a point coinciding with the adjacent nip end boundary P", a shearing force exerted by the roll P will have less effect on the belt than it would if the belt were of uniform thickness throughout its width.

**[0044]** In FIG. 7, the belt also includes a tapered portion D between the inner thick portion of the belt and an outer portion of uniform thickness less than the thickness of the inner thick portion. The tapered portion D extends from edge D1, at a point P<sub>n</sub> to the inside of the adjacent nip end boundary P", to edge D2. This belt is similar to that shown in FIG. 5, in that the belt is out of direct contact with the nip end of the belt. However, the belt of FIG. 7 differs from the belt of FIG. 5 in that the edge D2 of the tapered portion D in FIG. 7 is to the inside of the nip end boundary P". Accordingly, the distance "b" between the thin outer portion of the belt and the adjacent nip end boundary P" in FIG. 7 is greater than that in FIG. 5.

**[0045]** The angle of rake of the tapered portion D may be varied according to the hardness of the selected high molecular weight elastic material, and according to other factors, but preferably falls within the range of 0.4 and 0.5 degrees. It has been verified by experiment that the

maximum thickness difference between the edges D1 and D2 of the tapered portion D is preferably about 1.5 mm.

[0046] Another belt (not shown) embodying the invention comprises a central thick portion, a thin portion in the form of a recess to the outside of the thick portion, and another outer thick portion outside the outer thin portion. The recess should be located so that a part of the recess is directly opposite the nip end boundary P".

[0047] The shoe press belt according to the invention, which is characterized by a body comprising a hard portion and a portion of less hardness, a part of the less hard portion being directly opposite the boundary between the nip and non-nip zones, has the outstanding advantage that it does not tend to form cracks even though it is subjected to a continuous shearing force due to the fact that the nip zone width is less than the shoe width.

[0048] The less hard portion of the belt, which avoids the adverse effects of the shearing force applied by the nip end of the roll, can be produced easily by utilizing different high molecular weight elastic materials for the hard and less hard portions of the belt.

[0049] Alternatively, the difference in hardness between the two portions of the belt can be achieved by utilizing a dense high molecular weight elastic material for the hard portion of the belt and forming the less hard portion from a high molecular weight elastic material having voids formed therein. In this case, the less hard portion, which avoids the adverse effects of the shearing force applied at the nip end of the press roll, can be easily produced mechanically by filling the portion of the belt which is to be less hard with air bubbles or other voids.

[0050] Finally, a similar effect can be achieved by forming the belt so that it comprises a thin portion and a thick portion, so that a part of the thin portion can be located directly opposite to the boundary between the nip and non-nip zones. In this case, the belt is either out of direct contact with the nip end of the press roll or, if in contact, not subject to severe shearing forces.

## Claims

1. A shoe press belt for use in a shoe press having a nip zone narrower than the shoe, and at least one non-nip zone meeting the nip zone at a boundary, the belt having a body comprising a hard portion and a portion having less hardness, said portions being in side-by-side relationship, whereby a part of the portion of the belt having less hardness can be positioned directly opposite the boundary between the nip and non-nip zones.

2. A shoe press belt according to Claim 1, wherein the hard portion of said body comprises a high molecular weight elastic material, and the portion of said body having less hardness comprises a high molecular weight elastic material having a hardness less than that of the high molecular weight elastic material of the hard portion of the body.

lecular weight elastic material having a hardness less than that of the high molecular weight elastic material of the hard portion of the body.

3. A shoe press belt according to claim 1 wherein the hard portion of said body comprises a dense, high molecular weight, elastic material, and the portion of said body having less hardness comprises a high molecular weight elastic material having voids formed therein.

4. A shoe press belt for a shoe press including a press roll and a shoe, the press having a nip zone and a non-nip zone, the nip zone being formed between the roll and the shoe and being narrower than the shoe, the belt having a body comprising a thin portion and a thick portion, whereby a part of the thin portion can be positioned directly opposite the boundary between the nip and non-nip zones.

5. A shoe press comprising:

a press roll and a shoe, the press having a nip zone and at least one non-nip zone, the nip zone formed between the press roll and the shoe, and being narrower than the shoe, and the nip zone and the non-nip zone meeting each other at a boundary; and  
a press belt extending through the nip zone and the non-nip zone;

in which the belt has a body comprising a hard portion and a portion of less hardness, and in which a part of the portion of the belt having less hardness is directly opposite the boundary between the nip and non-nip zones.

6. A shoe press according to Claim 5, wherein the hard portion of said body comprises a high molecular weight elastic material, and the portion of said body having less hardness comprises a high molecular weight elastic material having a hardness less than that of the high molecular weight elastic material of the hard portion of the body.

7. A shoe press according to claim 5 wherein the hard portion of said body comprises a dense, high molecular weight, elastic material, and the portion of said body having less hardness comprises a high molecular weight elastic material having voids formed therein.

FIG.1

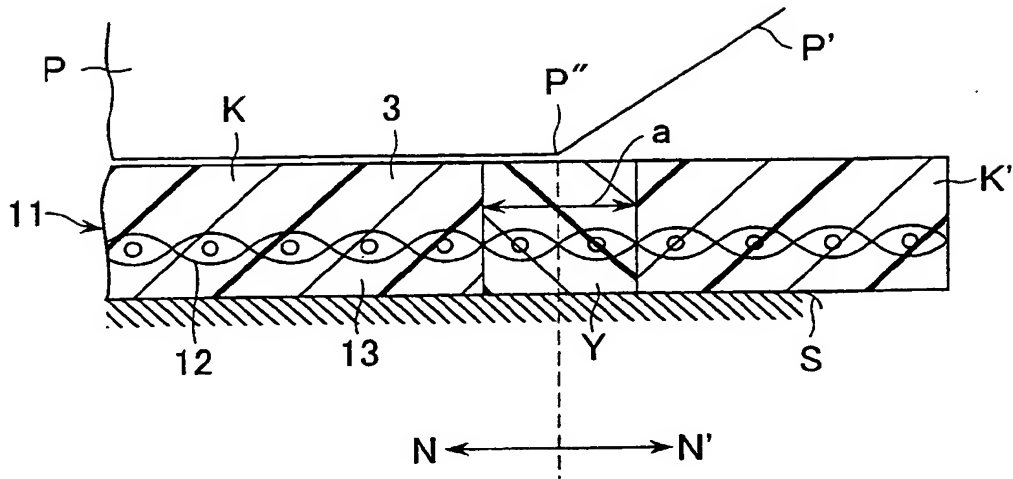


FIG.2

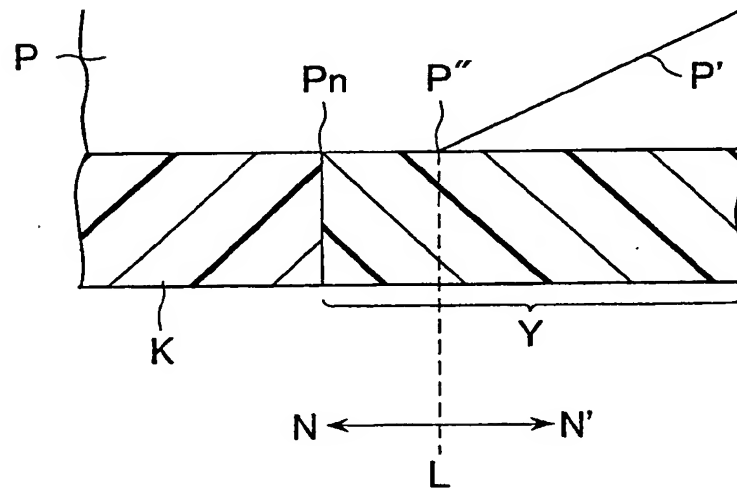


FIG.3

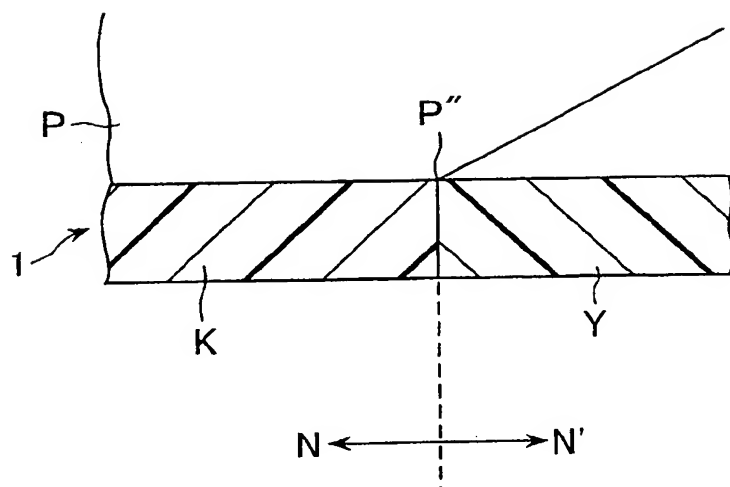


FIG.4

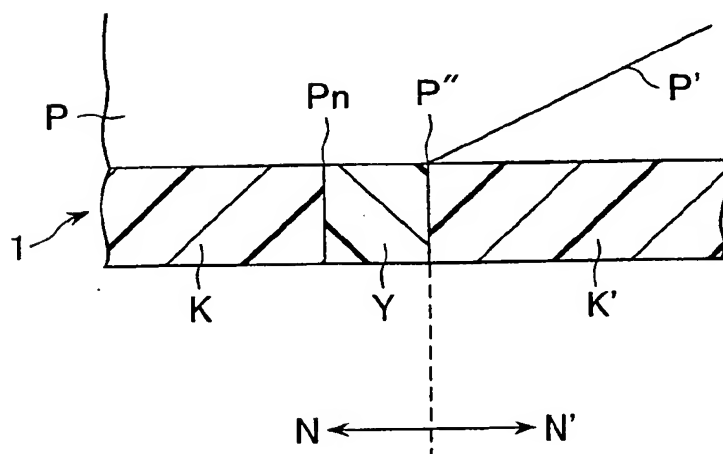


FIG.5

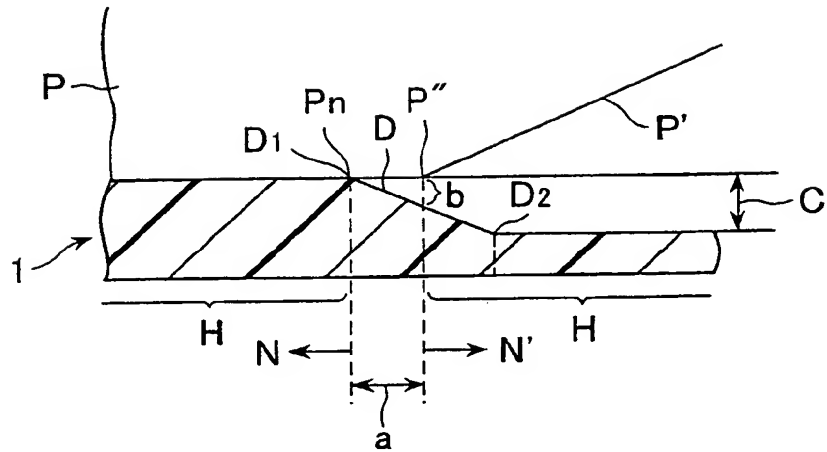


FIG.6

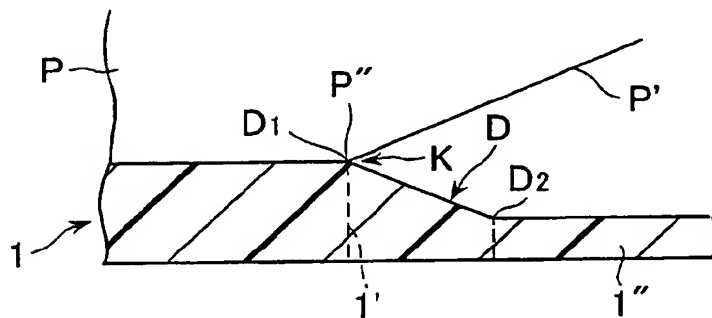




FIG.7

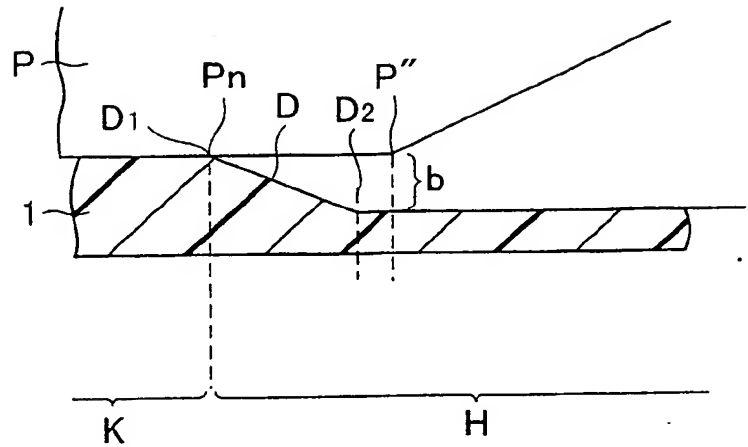


FIG.8

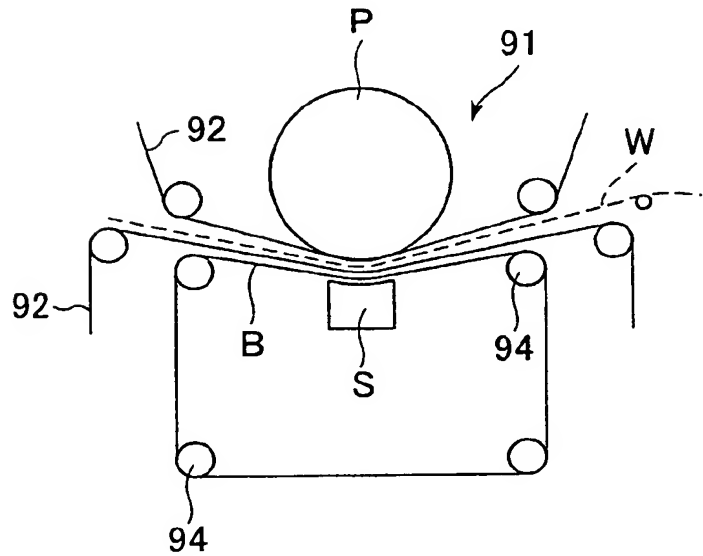


FIG.9


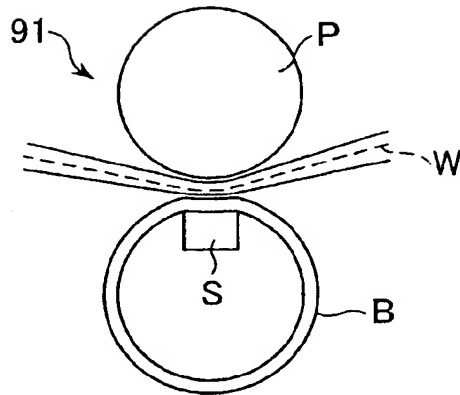


FIG.10



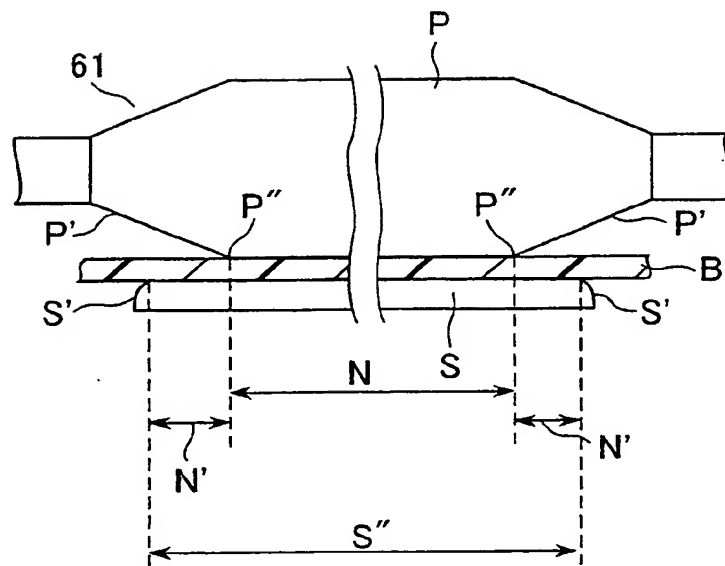

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**12.02.2003 Bulletin 2003/07**

(51) Int Cl.7: **D21F 3/02**

(43) Date of publication A2:  
**05.02.2003 Bulletin 2003/06**

(21) Application number: **02255326.7**

(22) Date of filing: **30.07.2002**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**IE IT LI LU MC NL PT SE SK TR**  
 Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Watanabe, Kazumasa,**  
**c/o Ichikawa Co., Ltd.**  
**Bunkyo-ku, Tokyo (JP)**

(30) Priority: **31.07.2001 JP 2001232599**

(74) Representative: **Meddle, Alan Leonard**  
**Forrester & Boehmert**  
**Pettenkoferstrasse 20-22**  
**80336 München (DE)**


(71) Applicant: **ICHIKAWA CO.,LTD.**  
**Tokyo (JP)**

(54) **Shoe press belt**

(57) In a shoe press belt, in which the nip zone (N) is narrower than the shoe width (S), the shearing force which normally acts on the belt at the outer boundary of the nip zone (N) is made either weak or non-existent by forming the outer portions (Y) of the belt of less hardness than the inner, or central, portion (K) of the belt, so that the less hard portions (Y) can be positioned directly op-

posite the outer boundaries of the nip zone (N). Alternatively, the outer portions (Y) of the belt can be made thinner than the central portion (K) of the belt and the thinner portions positioned directly opposite to the nip zone (N) boundaries. The shearing force applied to the belt at the nip ends of the roll is reduced or eliminated, cracking resulting from the shear force is reduced or avoided, and a belt having improved durability results.

**FIG.1**

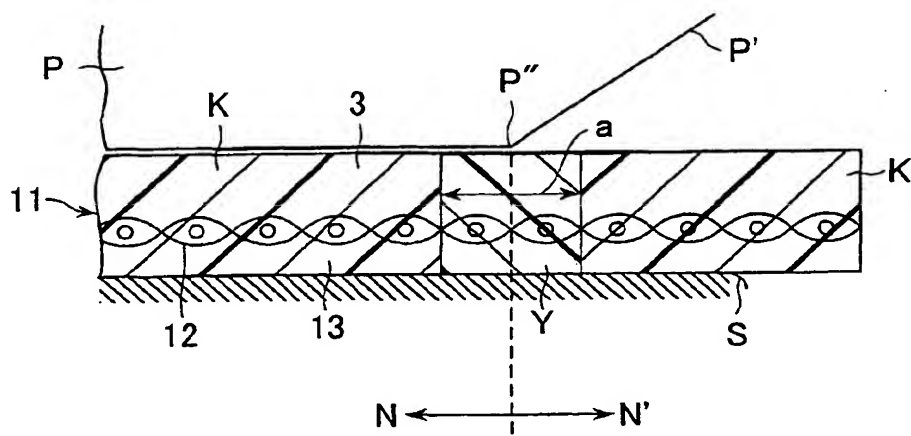



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 02 25 5326

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
X	EP 0 877 118 A (ICHIKAWA CO.) 11 November 1998 (1998-11-11) * the whole document *	1,2,5,6	D21F3/02
X	DE 44 01 580 A (J. M. VOITH GMBH) 1 June 1994 (1994-06-01) * the whole document *	1,3-5,7	
X	GB 2 082 218 A (BELOIT CORP.) 3 March 1982 (1982-03-03) * the whole document *	4	
A	GB 2 295 832 A (VOITH SULZER PAPIER-MASCHINEN GMBH) 12 June 1996 (1996-06-12) * the whole document *	4	
P,X	WO 02 48456 A (YAMAUCHI CORP.) 20 June 2002 (2002-06-20) * the whole document *	1,2,5,6	
			TECHNICAL FIELDS SEARCHED (InCL7)
			D21F
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		16 December 2002	De Rijck, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background ( : non-written disclosure P : intermediate document I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EP3 FORM 1503 02 82 (P04/01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 5326

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-12-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 877118	A	11-11-1998	JP 3045975 B2	29-05-2000
			JP 10298893 A	10-11-1998
			BR 9801430 A	15-06-1999
			CA 2230565 A1	24-10-1998
			EP 0877118 A2	11-11-1998
			NZ 329814 A	29-06-1999
			US 6042695 A	28-03-2000
DE 4401580	A	01-06-1994	DE 4401580 A1	01-06-1994
GB 2082218	A	03-03-1982	US 4330023 A	18-05-1982
			AR 223947 A1	30-09-1981
			BR 8105212 A	27-04-1982
			CA 1153922 A1	20-09-1983
			DE 3131843 A1	18-03-1982
			ES 8204785 A1	16-08-1982
			FI 812544 A	19-02-1982
			FR 2488629 A1	19-02-1982
			IT 1137839 B	10-09-1986
			JP 1247532 C	16-01-1985
			JP 57051892 A	26-03-1982
			JP 59020800 B	15-05-1984
			SE 8104882 A	19-02-1982
GB 2295832	A	12-06-1996	DE 4443598 A1	13-06-1996
			AT 405950 B	27-12-1999
			AT 197895 A	15-05-1999
			CA 2163833 A1	13-06-1996
			FI 955834 A	08-06-1996
			US 5766421 A	16-06-1998
WO 0248456	A	20-06-2002	JP 2002180393 A	26-06-2002
			AU 2409102 A	24-06-2002
			WO 0248456 A1	20-06-2002

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82